


FIG:F1222F

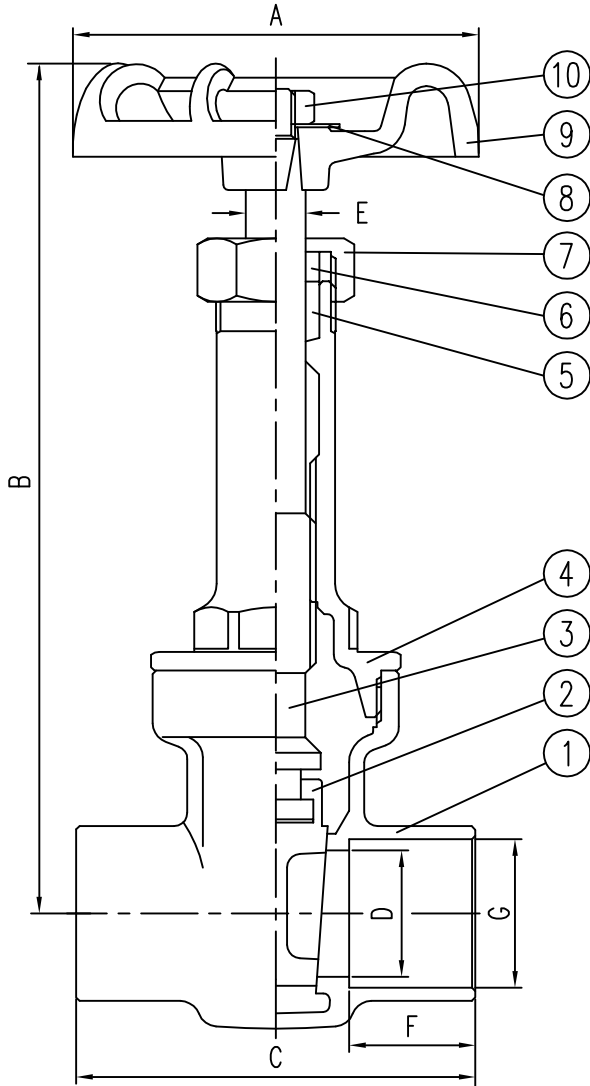

NO	DESCRIPTION	MATERIAL
1	BODY	BRONZE ASTM B62 C-83600
2	DISC	BRONZE ASTM B62 C-83600
3	STEM	BRONZE ASTM B62 C-83600 OR B21 C-48200
4	BONNET	BRONZE ASTM B62 C-83600 OR B124 C37700
5	PACKING	TEFLON OR WM806
6	PACKING GLAND	BRASS ASTM B16-C36000
7	PACKING NUT	BRASS ASTM B16-C36000 OR B124 C37700
8	ID. PLATE	ALUMINIUM OR B62 C-83600
9	HANDWHEEL	ALUMINIUM
10	HANDWHEEL NUT	STEEL

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
A		54	54	61	77	77	83	105	112	132
B		110	109	127	153	171	199	241	284	328
C		40	48	60	71	80	88	104	120	136
D		10	12.7	19.1	25.4	31.8	38.1	50.8	63.5	76.2
E		7.9	7.9	8.9	10.0	11.0	12.2	13.5	15.0	17.1
F		9.7	12.8	19.1	23.2	24.7	27.7	34.1	37.4	42.2
G		12.83	16	22.35	28.72	35.07	41.44	54.14	66.86	79.56

- 1.VALVES COMPLY WITH REQUIREMENTS OF MSS SP-80
- 2.BODY MARKINGS COMPLY WITH REQUIREMENTS OF MSS SP-25
- 3.SOLDER ENDS COMPLY WITH REQUIREMENTS OF ANSI B16.18

								FUSAN	
				件號	零件名稱		件數	材質	規範
△	心軸迫緊材質變更		2013 12.31	偉	比例	mm	第三角法 第 版本	BRONZE GATE VALVE CXC CLASS 125 RISING STEM	
順序	修訂事項		日期	修訂者	單位	名稱		圖號	
設計	王良偉				富山精機廠股份有限公司		GA-00-1		△
日期	2013年12月31日								2